



1:10 Scale Ready-To-Run 4WD Electric On Road Sport Chassis #30125



:: Introduction

Apex2 Sport Datsun 240z #30125 (1:10 Scale Ready-To-Run 4WD Electric On Road Sport Chassis)

Team Associated is excited to bring you the Japanese classic Datsun 240z in radio-controlled form. Built on a budget-friendly Apex2 Sport chassis, the Team Associated Datsun 240z is a beautiful true-to-life scale version of the full-size counterpart! The Apex2 Sport chassis features some of the latest features in on road racing. A front and rear independent suspension with oil-damped shocks and active rear toe give the Apex2 Sport the ultimate in handling on uneven tarmac. This makes it a perfect platform for the Datsun 240z!

:: Vehicle Features

- Steel dog bones and drive axles
- Sealed front and rear gear differentials
- Adjustable hook and loop battery straps
- 550-sized brushed motor
- Programmable ESC (with aftermarket program card)
- Injection-molded brake calipers and rotors
- Aluminum motor plate
- Adjustable shock mounting locations
- Bolt-on steering plates
- Molded one-piece tire rods and steering links
- Sealed receiver box
- Adjustable body post height locations
- Steel 25T servo horn
- Active rear toe suspension design
- Plastic tub main chassis
- 'Shorty' battery box
- POM-filled injection molded pivot balls
- Oilite Bushings

For better handling, A-arm front and rear independent suspension keeps the Apex2 chassis under control during the wildest of driving conditions.

Plastic body shock absorbers smooth out the bumps when ripping around the rally course.

Active rear suspension allows the amount of toe change to be adjusted through the suspension cycle, increasing or decreasing rear grip.

A sealed center driveline keeps dirt and debris out for smooth and reliable power delivery.

The Reedy's 550 15-turn 3-slot motor provides plenty of torque and tire ripping speed.

Reedy SC500X programmable brushed ESC (program card sold separately) and Reedy Sport 550 15-turn 3-slot brushed motor

A 1970s CLASSIC JAPANESE SPORTS CAR

One of the most successful sports car lines ever produced, the trendsetting 240z was conceived of by Yutaka Katayama, the President of Nissan Motor Corporation U.S.A., and designed by a team led by Yoshihiko Matsuo, the head of Nissan's Sports Car Styling Studio. This iconic sports car is over 50 years old and looks just as stunning now as it did in the 70s. Its popularity among automotive enthusiast makes this car a prized find for any auto collector.

Team Associated is proud offer an officially licensed Datsun 240z in 1:10 scale form for the Apex2 Sport chassis. This awesomely designed single-piece polycarbonate body features a highly-detailed decal sheet, injection-molded fender mirrors, windshield wipers, spoiler, exhaust, and chrome-plated front and rear bumpers. Modeled after wheels from that era, the 1.9 bronze-colored turbine-style rims are the perfect fit on this realisic-looking Datsun 240z.

Injection-molded brake calipers and rotors give the Apex2 Sport chassis scale looks. The injection-molded exhaust, spoiler and chrome-plated bumpers add scale realism to the 240z. High-grip rubber tires wrapped around 1.9 (41mm) bronze turbine-style wheels

Specifications

opecifications	
	1:10
	On-Road
	Electric
Lenath	458mm
	200mm
	259mm
	Varies
Chassis Material	Injection-molded plastic
Suspension	Independent A-arm suspension
Internal Gear Ratio	Varies
Axle Ratio	2.6:1
Drivetrain	4WD
Speed	Varies
	48 Pitch
	RTR
Shock type	Plastic coilover
Experience Level	Beginner to Advanced
Recommended Environment	Street or paved surfaces

Peak Detection Charger or LiPo Compatible Charger

:: Additional

Your new RTR comes factory assembled including radio gear, motor, and ESC.

- However, there are some items you will need to complete your kit (refer to website for suggestions):
- AA-size batteries for transmitter (#302 x4)
- 2/3S LiPo battery pack w/High Current T Plug (shorty packs only).

:: Other Helpful Items

- Silicone Shock Fluid (Refer to website for complete listings)
- Green Slime shock lube (AE # 1105)
- Thread Locking Compound (AE # 1596)
- 7 Piece Hex Driver Set (AE # 1650)
- Calipers or a Precision Ruler

Associated Electrics, Inc. 21062 Bake Parkway. Lake Forest, CA 92630



- Silicone Diff Fluid (Refer to website for complete listings)
- Cyanoacrylate glue (AE # 1597)
- Body Scissors (AE # 1737)
- FT Nut Drivers (AE #1519)
- Reamer / Hole Punch
- Customer Service Tel: 949.544.7500 Fax: 949.544.7501

• Needle Nose Pliers

Hobby Knife

Wire Cutters

• Soldering Iron

http://www.RC10.com • http://twitter.com/Team_Associated • http://www.instagram.com/teamassociatedrc/ • http://www.facebook.com/TeamAssociated/



:: Hardware - 1:1 Scale View

Flat Head Screws (fhcs)

2.5x10mm (31350)
2.5x14mm (41077)
3x6mm (31541)
3x8mm (25201)
3x10mm (25202)
3x12mm (25203)
3x14mm (89208)

Button Head Screws (bhcs)

2x3mm (31509)
3x4mm (91158)
3x5mm (31530)
3x6 mm (31531)
3x8mm (31532)
3x10mm (25211)
3x12mm (89202)
3x14mm (25187)
3x16 mm (89203)
3x18mm (2308)
3x20 mm (25188)
3x22 mm (25189)
3x24mm (89204)
3x26 mm (89205)
3x28mm (41078)

LP Socket Head Screws (lp shcs)

3x6mm (41089)
3x10mm (41090)
3x16mm (41093)
3x20mm (41091)

Socket Head Screws (shcs)

2x5mm (31511)
2x8mm (7187)
2.5x6mm (41079)
2.5x10mm (41087)
2.5x14mm (71032)
2.5x16 mm (41086)

Shims and Washers

$\bigcirc \llbracket$	3x7mmx1mm (42260)
$\bigcirc[$	3x7mmx2 mm (42260)
$\bigcirc [$	3x7x3mm (42260)
$\bigcirc \square$	3x7x5mm (42260)
$\bigcirc \square$	3x7x7mm (42260)


Set Screws

	3x3mm (25225)
	3x16mm (4689)
	4x16 mm (4677)
Pivot Balls	
Pivot B	all, Short (42041)
Pivot Ball, Long, Upp	oer Shock (42041)

Locknuts



Bearings



Misc. Screws Shoulder Screw 3x4x10mm (42070) Ax12mm Screw Pin (42022) Pin 2x11mm (42019)

: Table of Contents	
I Cover	9 - 12Front / Rear Suspension Build
2Introduction	11 - 14Chassis Build
31:1 Hardware "Fold Out"	14Tire Build
1Table of Contents	15 - 17Body Build
5 - 7Quick Start Guide	18 - 19Nissan
3Shock Build	20Back Cover
3Gear Differential Build	
: Notes	
This symbol indicates a special note or instruction in the manual.	
This symbol indicates a Racers Tip.	There is a 1:1 hardware foldout page in the front of the manual. To check the size of a par line up your hardare with the correct drawing until you find the exact size. Each part in the foldout has a number assigned to it for orderin replacement parts.
Associated Electrics, Inc.	Customer Service Tel: 949.544.7500

10/22

:: Quick Start Guide Battery Charging Steps and Safety:

Remove the battery from the vehicle before charging. Place battery on a fire resistant surface. Avoid any contact with water or other liquids. Be sure to select the correct charging mode for the type of battery you are charging.

ALWAYS use a compatible charger for charging your batteries.

Caution: Never leave the battery unattended while charging. Always disconnect the charger from the power source when finished charging.

Caution: Always disconnect the battery when you are finished driving the vehicle.




Peak Detection Quick Charger


:: Quick Start Guide - (cont.) Battery Installation:

- 1. Install the battery with the battery wires directed towards the front of the vehicle.
- 2. Secure the hook and loop strap near the rear shock tower.
- 3. Secure the hook and loop strap near the front shock tower.

You may move the foam pad to either the front or the rear of the battery compartment to adjust the weight balance of the vehicle.

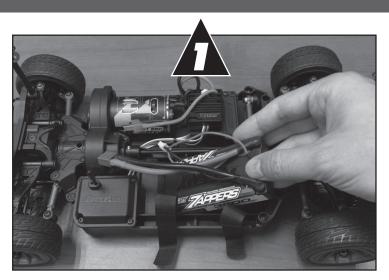

:: Quick Start Guide - (cont.)

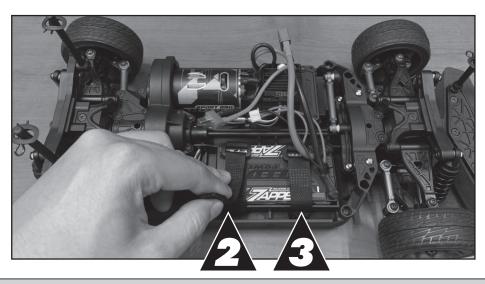

:: Quick Start Guide - (cont.)

Battery Notes and Tip:

Connect the battery as shown. Disconnect the battery when not in use!

LiPo: LiPo batteries (lithium polymer) are high current rechargeable batteries. LiPo batteries offer extended run time and peak performance over NiMH batteries. They require a peak detection charger designed specifically for LiPo batteries. These batteries require special care and handling. LiPo batteries are recommended for advanced users only! ALWAYS charge a LiPo battery in LiPo mode.

If using a 3S LiPo battery, use a smaller pinion gear as a starting point (use part # 1335 17T Pinion). This provides the correct gear ratio required for the more powerful 3S LiPo battery. Gearing will depend on the surface you are running on, and the size of the track/area that you are driving in.



:: Quick Start Guide - (cont.)

Radio System Tuning and Controls:

RULE: Transmitter on First/Vehicle on Second, Vehicle off First/ Transmitter off Last!

- 1) Slide the battery cover to remove cover.
- 2) Install alkaline or rechargeable AA size

batteries into the battery holder.


- 3) Slide the battery cover back into place making
- sure it is completely closed and secure.
 4) Turn the power ON. If the power indicator LED fails to light, check the batteries for insufficient contact or incorrect polarity.






:: Quick Start Guide - (cont.) **Radio System Tuning and Controls:** N R **DO NOT** hold the trigger when turning on the radio. If using optional battery for transmitter, be sure to plug it in correctly. Plugging in a battery backwards can cause damage. Refer to Radio owners manual for more in-depth instructions on radio operation and functions. D/R TRIM **Adjust steering** trim so front wheels point straight. Push trigger for Brake Neutral **Pull trigger** 0 for Throttle 0 **Throttle set to Neutral!**

:: Quick Start Guide - (cont.)

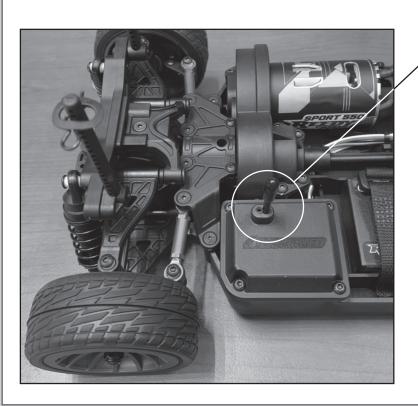


Install antenna wire through antenna tube, then install antenna / tube as shown.


> Install body and body clips. Ready to go!

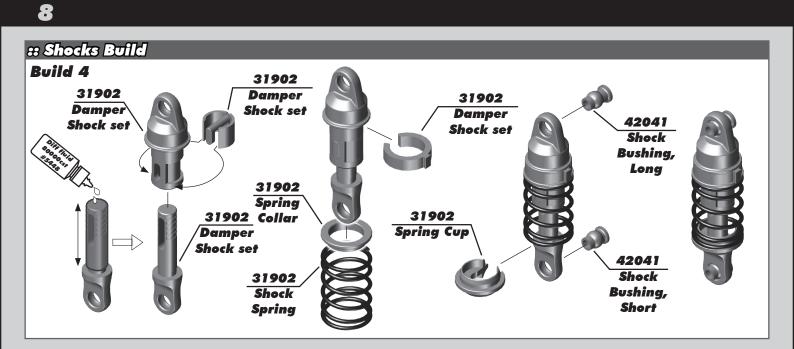


:: Gear Diff Build - Step 1 **Build 2** 92132 **E** 31887 Sun Gear Ring and 92143 🖂 **Pinion Gear** Diff Shim 31872 2 Diff Pin 31859 91563 र्रन्थ 2x9mm **Diff Case** 10 x 15 x 4 **Bushing** 92133 **E Diff O-Ring** 31884 🖂 **Gear Diff Outdrive**




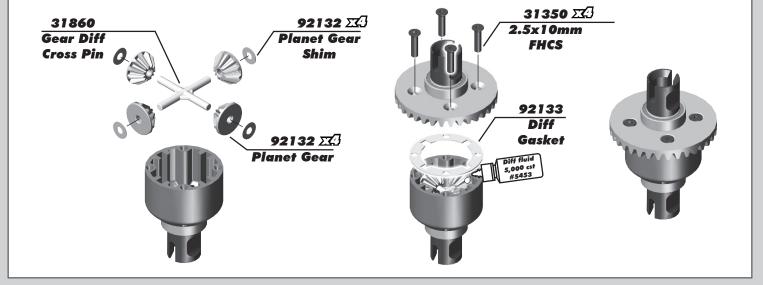


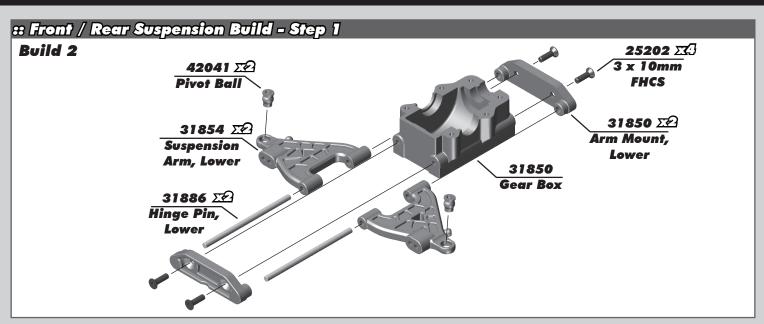



:: Front / Rear Suspension Build - Step 2

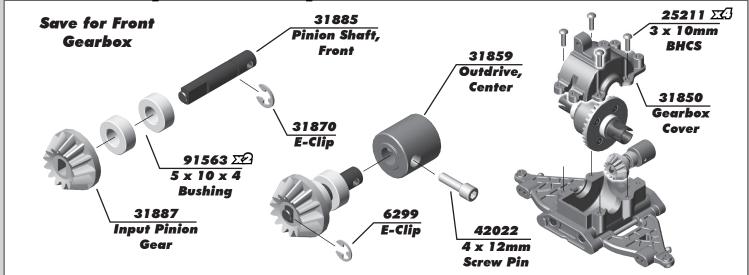


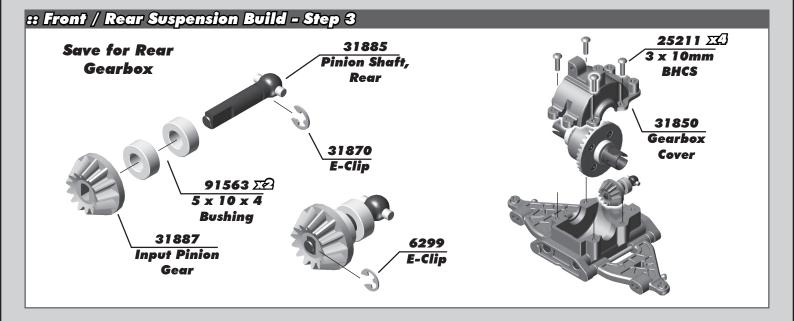


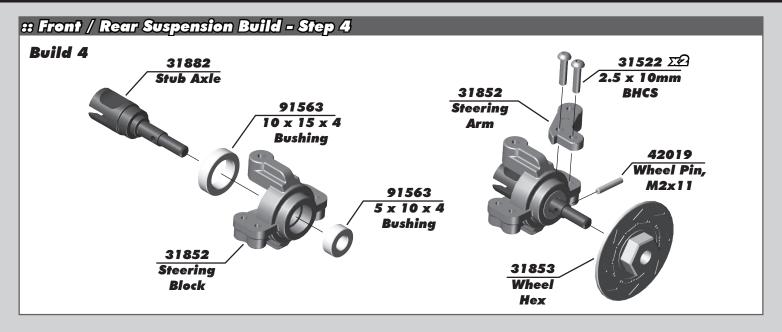


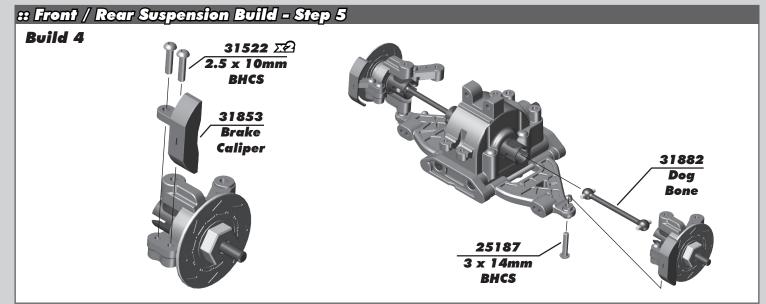

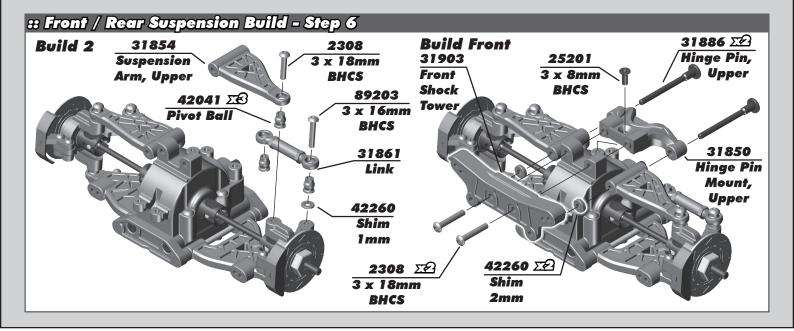


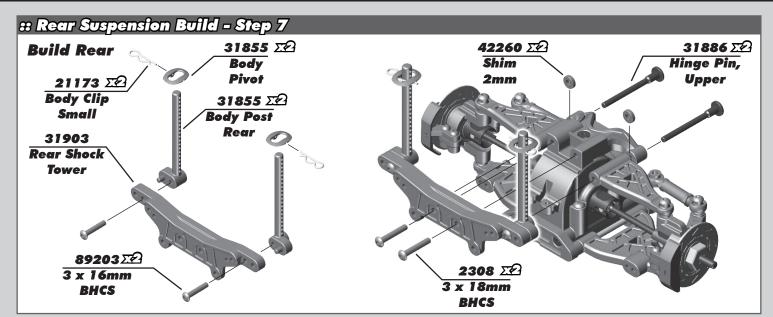

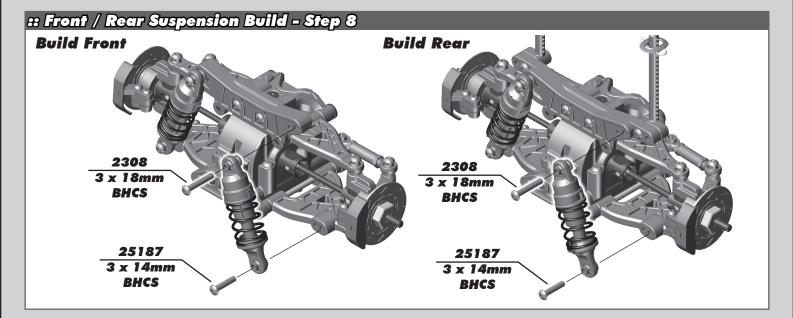


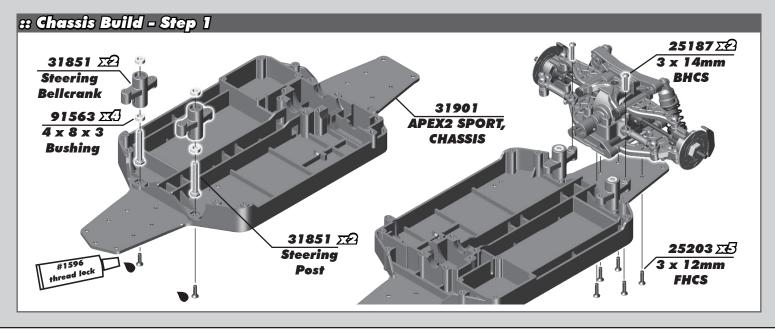




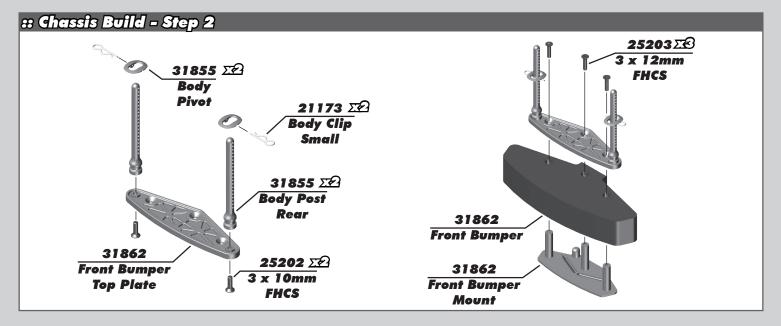


:: Chassis Build - Step 3

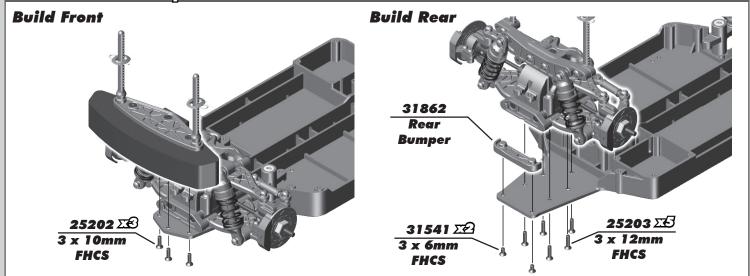


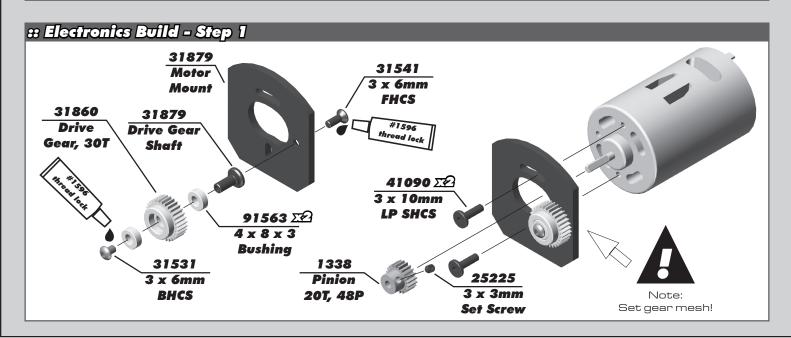


:: Electronics Build - Step 2 31863 #1596 31888 92149 thread lo DIFF SPOOL Diff Cap Spur Gear 31872 ट्रस्टी 72T, 48P **Diff** Pin 2x9mm 31888 DIFF 31888 🖂 PUMPKIN DIFF OUTDRIVE 31532 ZZ 91563 🖂 3 x 8mm 0 x 15 x 4 BHCS Bushing 31350 🖽 2.5x10mm FHCS

:: Electronics Build - Step 3 25211 ZII 31859 2 3 x 10mm Outdrive, 42022 **X** BHCS Center 4 x 12mm Screw Pin 31901 Center **Gear Box** Case, Top 5407 Red **O-Ring** 31885 Drive Shaft, Center

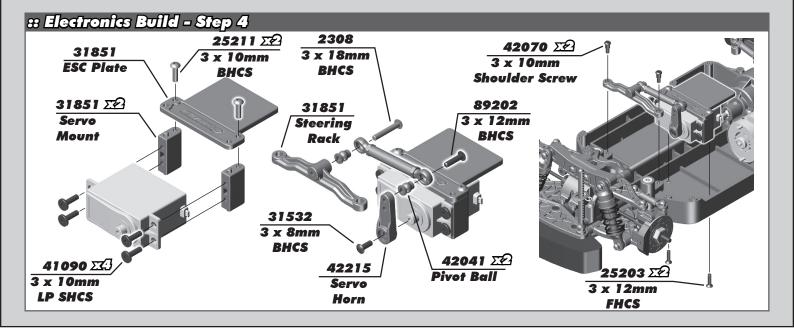


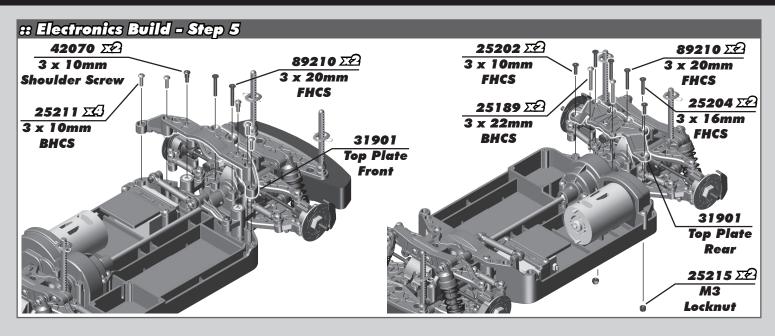


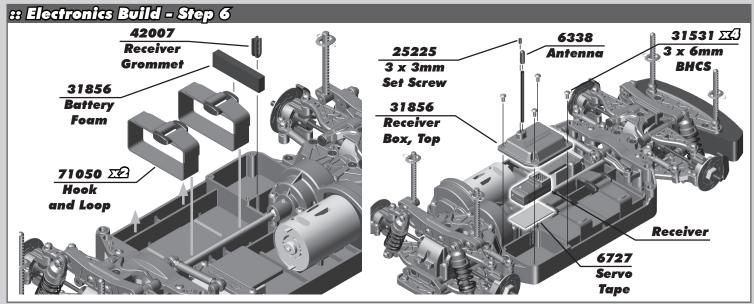


:: Electronics Build - Step 7

:: Tires and Body Build - Step 1

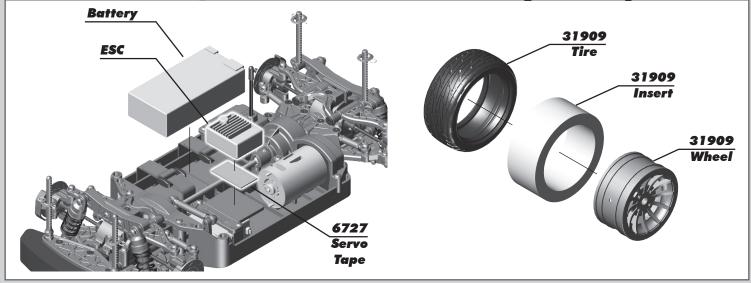


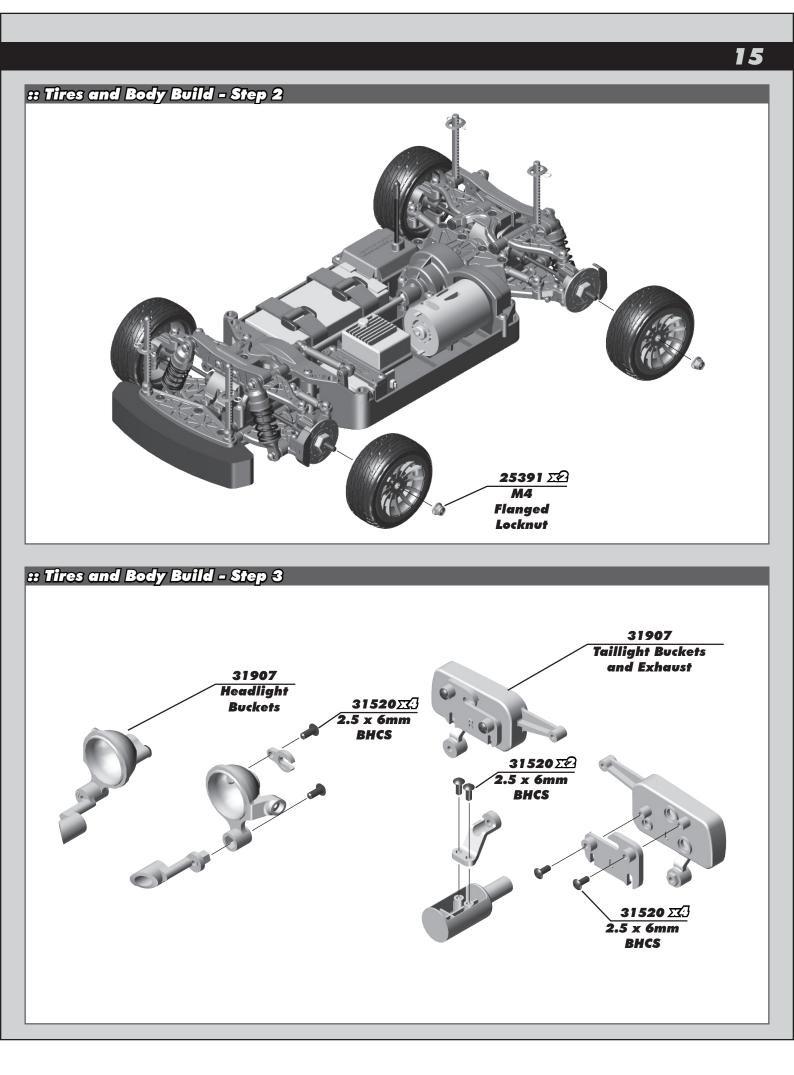

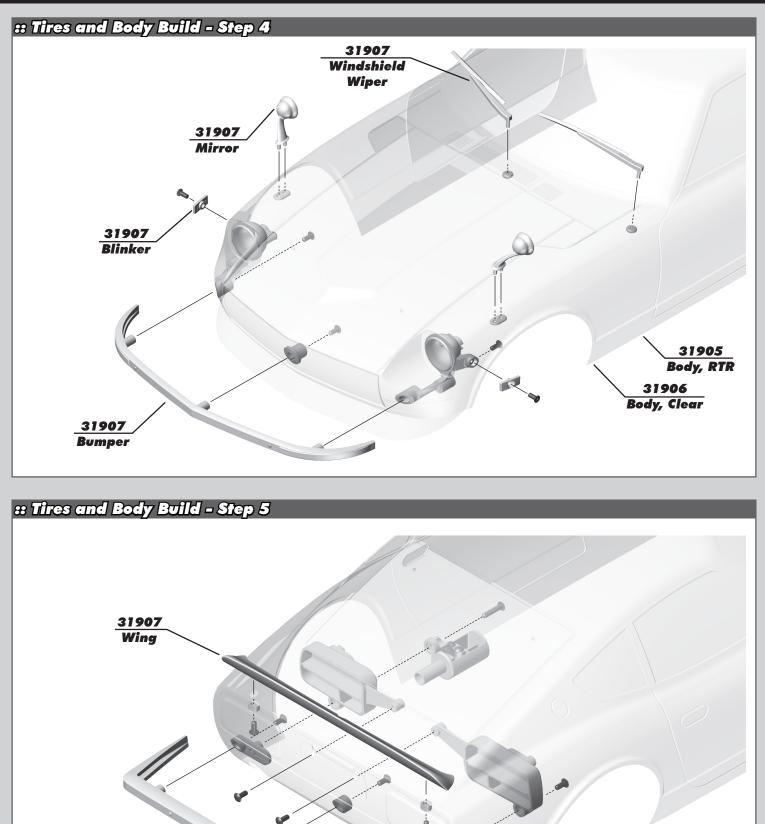

<u>31907</u> Bumper :: Tires and Body Build - Step 6 21173 223 Body Clips 2

FIND IT ON ASSOCIATEDELECTRICS.COM



Vehicle Spare Parts GO TO: AssociatedElectrics.com Team Associated tab Cars & Trucks Scroll to your vehicle Parts & Accessories link



Setups and Manuals GO TO: AssociatedElectrics.com Team Associated tab Manuals & Setups Scroll to your vehicle



Tuning Guides & Tips GO TO: AssociatedElectrics.com Support A-Team Apps



Associated Electrics, Inc. 21062 Bake Parkway Lake Forest, CA 92630 USA

call: (949) 544-7500 - fax: (949) 544-7501 Check out the following web sites for all of our kits, current products, new releases, setup help, tips, and racing info! www.AssociatedElectrics.com

FOLLOW US ON SOCIAL MEDIA



TeamAssociated ReedyPower



@TeamAssociatedRC @ReedyPower



@Team_Associated @ReedyPower